




CHUCKS, AIRSHAFTS & CORE ADAPTORS



DK40 Safety chuck with 6" mechanical expanding core chuck.

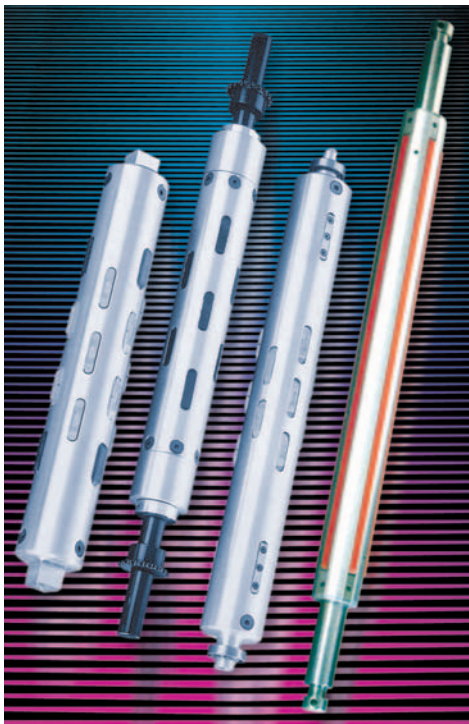

Single and multi bladder airshafts with continuous and intermittent lug designs.

CHUCKS

- SAP (foot mounted) and SAF (flange mounted) safety chucks available for 30mm and 40mm square shaft ends. Designed to be self centering and self locking, the chucks have an additional safety feature of a spring loaded locking pin which prevents accidental opening during operation.
- DK foot and flange mounted safety chucks with axial movement for 30mm and 40mm square shaft ends.
- SRP (foot mounted) and SRF (flange mounted) safety chucks with tilting flange release. The self locking safety chucks are available for 30mm, 40mm, 50mm and 80mm square shaft ends.
- MX16.3 self centering pneumatic chuck with AX diameter adaptors for shaftless application. Adaptors available for 100mm (4"), 120mm (5") and 150mm (6") diameter cores.

AIRSHAFTS

DX type expanding shafts are made of aluminium with an extruded profile or may optionally be made of steel or ERGAL, a special aluminium alloy which allows approx 30% increase in the shaft's capacity without increasing weight. In the standard version, the shafts have rubber/aluminium or vulcanised rubber strip.

The journals may be made to drawings if requested, however, standard versions can be supplied with journals which engage with our safety chucks and designed to make locking easy. These journals are of the square and alveolar type.

DX type expanding shafts are supplied with the following characteristics:

- Steel or aluminium with strips of 25mm (1") to 300mm (12") diameter.
- Hard anodising (black 50Hrc) for lasting protection.*
- Hardened journals (55/60 Hrc) steel 39 NiCrMo3.
- 6-slot profile.**

*For shafts 69mm, 75mm (3") & 148mm (6") - **For 69/75mm shafts.

STRIP & RUBBER CORE ADAPTORS

- Pneumatic adaptors with strips can be made at the customer's request, starting with a 3" diameter.
- The standard versions offered are 3" and 6".
- Pneumatic adaptors with continuous rubber sleeve are available in 3" and 12" versions.

TO VIEW THE RE SPA WEBSITE CLICK HERE